


We test, you produce.

F26 SPEED COMPACT LEAK TESTER FOR HIGH SPEED PRODUCTION

Without any doubt, the smallest high-performance leak tester on the market. Specially adapted for automatic and semi-automatic test machine, the **F26 Speed** has a full range of specifications at a very competitive price.

Highlights

- COMPACT
- TOUCHSCREEN PC UI
- EASY INTEGRATION

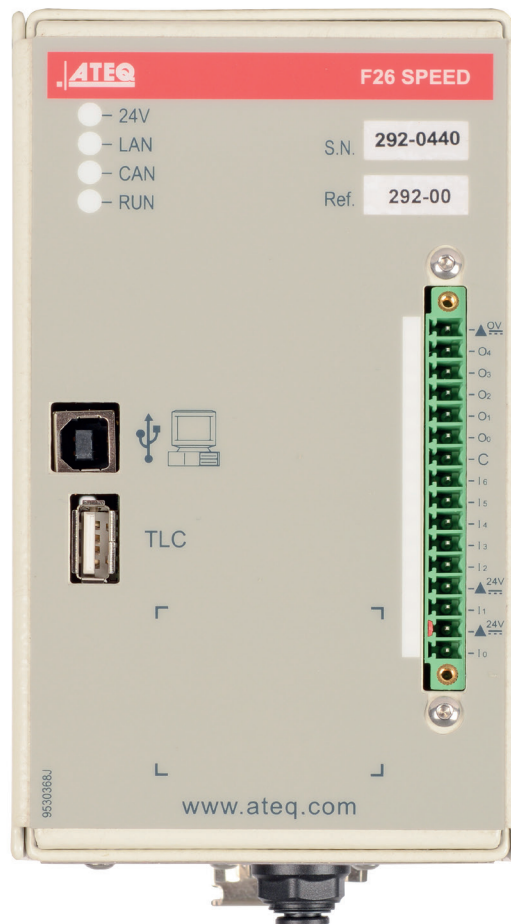

Applications

Blister, sachet, pneumatic and hydraulic fitting...



F26 SPEED

COMPACT LEAK TESTER

FOR HIGH SPEED PRODUCTION

Gamme de mesure

Pressure	Accuracy	Max. Resolution	ΔP . Measurement	Accuracy	Max. Resolution
vacuum	± 2% of the full scale	1 mbar	500 Pa - 1000 Pa - 2000 Pa - 5 kPa	± 4% of the full scale	1 Pa - 10 Pa
-500/+500 mbar			500 Pa - 1000 Pa - 2000 Pa - 5 kPa		1 Pa - 10 Pa
0 - 500 mbar			500 Pa - 1000 Pa - 2000 Pa		1 Pa
0 - 2 bar		10 mbar	1000 Pa - 2000 Pa - 5 kPa - 10 kPa		1 Pa - 10 Pa
0 - 5 bar			2000 Pa - 5 kPa - 10 kPa - 20 kPa		1 Pa - 10 Pa
0 - 10 bar			5 kPa - 10 kPa - 20 kPa - 50 kPa		10 Pa
MECHANICAL PRESSURE REGULATOR (OPTIONAL) OUT OF THE INSTRUMENT Vacuum - 500 mbar - 5 bar - 9 bar					



Main Features

- Leak testing by pressure drop (until 10 bar)
- Measurement ranges : (ΔP) P.E.: 500 Pa to 50 kPa
- 8 programs
- Networking several modules (via CAN)
- Set up on line via USB port
- Compact enclosure
- Flexible mounting styles
- Integrated fill and dump valves
- Flexible communication formats : RS232, USB, Ethernet (For printer and PC)
- Environment : ROHS standard (Restriction of the use of certain Hazardous Substances)


Technical specifications

Temperature	Operating: + 10°C to + 45°C Storage: 0°C to + 60°C
Interface	Cycle in progress CAN - Ethernet - 24 V
Weight	Approximately 1.5 Kg
Physical	Dimensions (WxHxD) 88x163x85 mm
Air supply	Clean and dry air required Air quality standard to be applied (ISO 8573-1)
External power supply	24 V DC - 1.6A Main power supply 110 - 230 V AC supplied

→ **THE FASTEST:**
(Part volume of 1 cm³ and test pressure 2 bar)
Test cycle = 0,02 sec

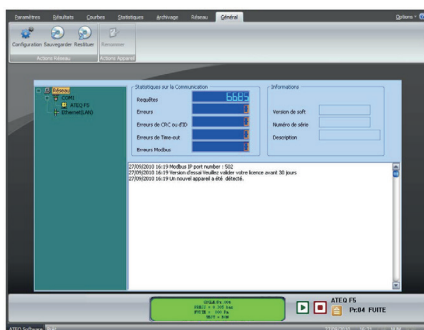

Software

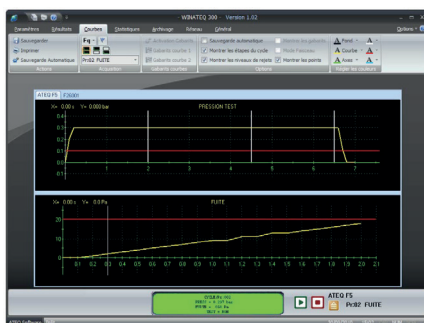

Accessories

- ATEQ software
 - Printer
 - Modem
 - Leak flow calibrator
 - Set up on line
 - Leak jets
 - Filtration kit
 - Connectors
- Please refer to ATEQ accessories list



CDF 60 :
LEAK FLOW
CALIBRATOR



Connectors

